MINISPLIT: CASSETTE

SPECIFICATIONS

		Indoor			MKC-MKH				
MODELS		Unit	25		35		45	55	
		Outdoor			MOC-MOH				
		Unit	25		35		45	55	
Capacities	Cooling	Btu/h	24,000		32,000		42,000	52,000	
		kW	7.0		9.4		12.3	15.2	
		kcal/h	6,060		8,080		10,606	13,131	
	Heating	Btu/h	25,600		32,500		42,800	52,800	
		kW	7.5		9.5		12.5	15.5	
		kcal/h	6,465		8,207		10,808	13,333	
Compressor		Type	Reciprocating						
Refrigerant			R-22						
Power Supply		V/Ph/Hz			220-240/1/50 or 380-415/3/50				
		Ph	1	3	1	3	3	3	
Power Consumption		kW	2.8	2.7	3.4	3.3	4.77	5.6	
Running Current		А	13.0	5.4	16.4	6.8	8.9	11.2	
Indoor Air Flow		m³/h	1,260		1,260		1,800	2,100	
Noise Level	Indoor	dBA	39/42/44		39/42/44		39/42/44	42/44/48	
	Outdoor	UDA .	57		58		60	63	
System Operation Control				Wired	or Wireless Control with LCD Display				
Dimensions	Indoor/Outdoor	H (mm)	290/696		290/900		340/1,142	340/1,142	
		W (mm)	710/850		710/850		810/850	810/1,06	
		D (mm)	710/287		710/285		810/285	810/345	
Net Weight	Indoor	kao	36		36		42	44	
	Outdoor	kgs	68		85		90	109	
Piping	Connection	Connection Type		Flare and Nuts					
	Size	Suction	5/8"		5/8"		3/4"	3/4"	
		Liquid	3/8"		3/8"		3/8"	3/8"	
The Nominal Cooling	Capacity is based	on:		The	Nominal I	Heating (Capacity is based	on:	
Indoor Air Temp. 27°C DB / 19°C WB - Outdoor Air Temp. 35°C DB									

Piping length: 5m

Piping length: 5m











PRODUCT:

- Four way air flow system
- Quiet Turbo fan
- Easily detachable grill for cleaning
- Air filter







- Wired or wireless versions available Room temperature setting
- 5 Operation modes
- (Cool/Heat/Auto/Dry/Fan) • Sleep mode and independent
- on off Timers
- 3 speed fan control

- Filter cleaning indicator
- LCD display with clock
- Auto restart memory
- Diagnostic function with LED indicators


CONDENSING UNITS:

- Quiet operation with sound insulating blanket and rubber mounting on compressor
- High efficiency compressor
 - Built-in drain pipe connector for condensate (heat pump only)







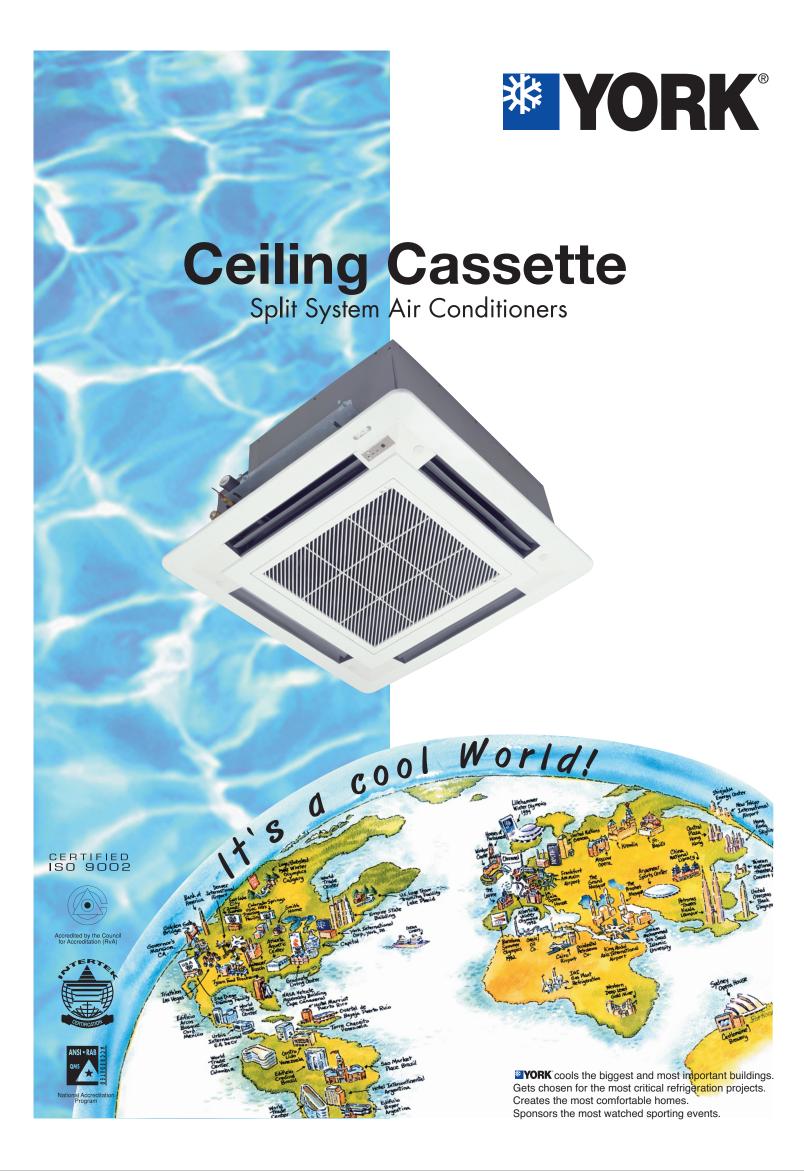

BE-MK0101-05 035T73000-002